1600x3200mm 12mm & 20mm THICKNESS Merakee 2.0





UNFOLD

SURFACES

THAT

ARE

BOUNDLESS

CCELERATING SPACES WIT




BRING TO YOUR SPACE THE MULTITUDES OF MARVELS AND MASTERPIECES

STORY OF THE BRAND

Our offering is a product of vision, demand, and an objective of delivering ceramic products that add iconic value to spaces. It is also a passionate endeavor encouraged and inspired by the efforts of sustainability for a better tomorrow.

We believe in delivering an experience beyond excellence and the same is fulfilled by revolutionary ceramic products dominating the luxury sector of the tiling industry backed by innovation, technology, and a pioneering vision.

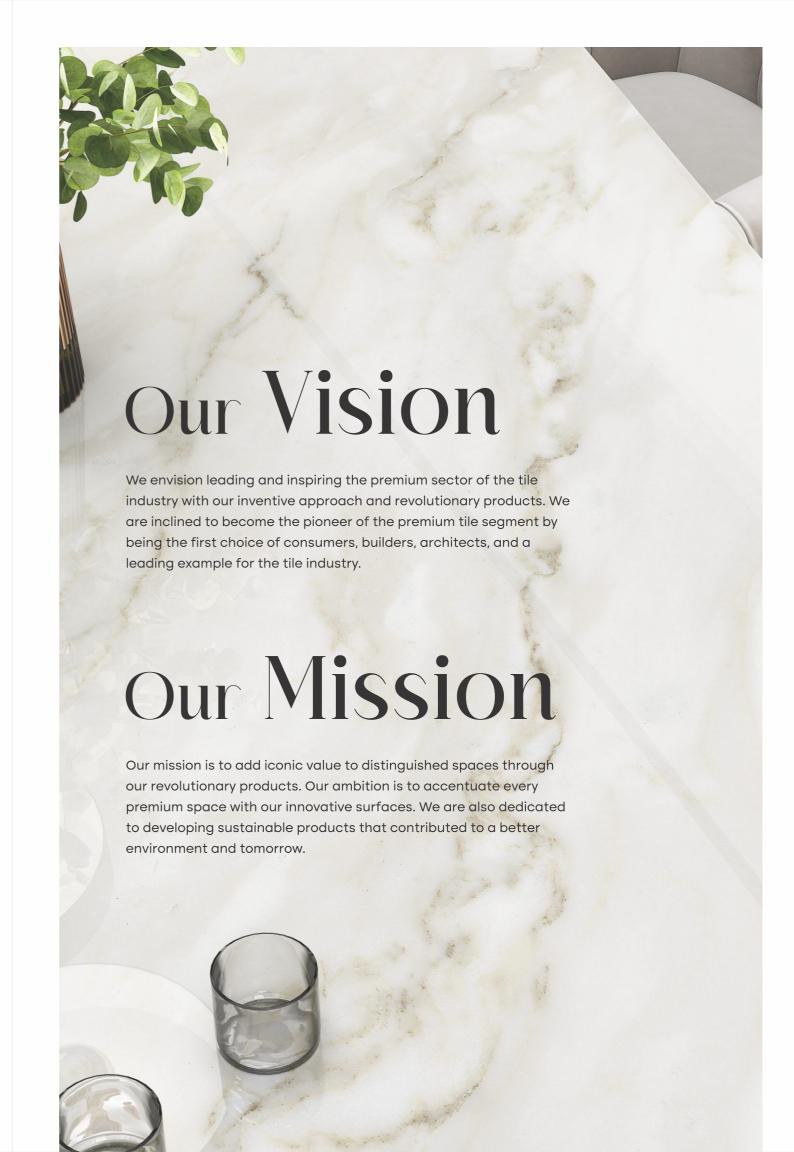

FORMAT & THICKINESS

Witness creativity that has been supercharged with 12mm thickness to bring a dose of durability to your space. Install versatility in your space and power up its application to various areas.

Thickness

□ 12mm

≥ 20mm

Let the magnificence of 1600x3200mm slabs ignite your space with the allure of appearance.



1600x3200mm 63"x126"



SURFACES DETAIL



STARLIGHT

Embrace sophistication with tiles with a flat surface, mirror-like sheen, and star-like brilliance. The small glitter enhances the overall aesthetic appeal of any space.

Starlight is the premium surface that aligns with contemporary elegance and timeless style, elevating your interior design to a realm of unparalleled refinement.



SPECULUM

The surface of these tiles is impeccably flat, devoid of any waviness or imperfections. The surface boasts a flawless finish, resembling a polished mirror, reflecting light with pristine clarity. Their smoothness creates a sleek and elegant appearance, enhancing the aesthetic appeal of any space they adorn.

With their mirror-like reflection, they lend an air of sophistication and modernity to interiors, captivating the eye with their pristine sheen. Whether in bathrooms, kitchens, or living areas, these tiles exude a sense of luxury and refinement, elevating the ambiance with their impeccable surface.



HONED

Explore the synergy of style and functionality with Honed Surface having a satiny touch. The smoothness redefines modern aesthetics and enhances tactile experiences. It enhances the richness of surroundings with eye-catching patterns and eccentric designs.

Its refined texture exudes sophistication while seamlessly integrating with diverse interior design schemes, elevating spaces with an understated elegance that captivates the senses.



MILAGRO

The exceptional surface, Milagro, has unmatched smoothness, setting a new standard in surface quality. Its distinctive matte finish not only enhances its aesthetic appeal but also adds a tactile dimension to its allure.

With Milagro, we have redefined the concept of surface perfection, offering a blend of elegance and functionality unparalleled in the industry.

BRILLO

The Brillo surface has a remarkable shiny appeal with vivid shades of elegance, adding a luxurious touch to myriad spaces. These surfaces bring an air of classiness to the surroundings they adorn.


Brillo Surfaces have an innate ability to elevate any environment with their exquisite texture and lustrous finish.



LEGACY

Legacy boasts a premium matt surface that exudes elegance and sophistication. Its smooth, structured surface offers a luxurious feel while adding a touch of timeless charm to any space.

Elevate your interior design with these exquisite tiles, infusing style and durability seamlessly. These surfaces, when laid, speak volumes and veracity.

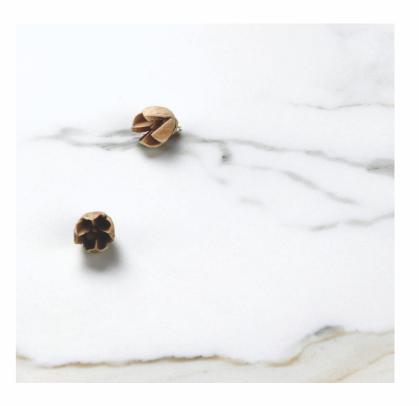



LEATHER

The Leather surface exudes rustic charm, inviting a touch with its rough texture. Minor embossing adds a subtle depth, creating a nuanced visual appeal.

Each tile becomes a testament to craftsmanship, blending tactile sensations with aesthetic delight. A sense of warmth and sophistication effortlessly emerges in spaces adorned with these tiles.

A DISPLAY OF PAGEANTRY

A validation of the evolving world of art, these slabs are an acclamation of creativity. The three varied surfaces create a mirage of stunner styles that remain at par with elegance.









TECHNICAL FEATURES

Upkeep your surfaces with tiles that are composed of features that make them the ideal choice. These masterpieces are a magnitude of modern designs blended subtly with functional features.



Highly UV Resistant



Frost Resistance



Waterproof



Resistance to high Temperatures



.....



Resistant to Scratches



Resistant to




asy to Clean



nti Bactorial



Resistant to Chemicals

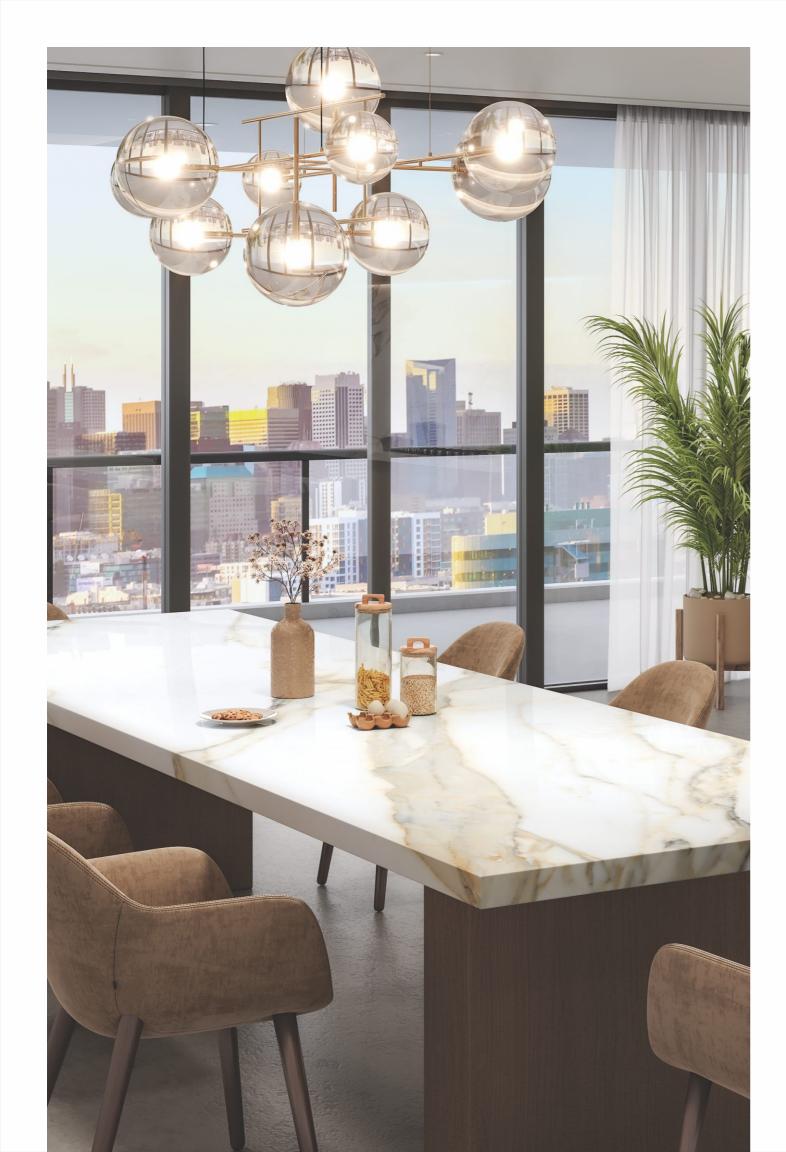



RECORD SPLENDOUR



SLIM

Unravel new vistas for innovative applications

Elevate space with slabs carefully curated with slim size, merging form and function harmoniously.



DESIGN

Unravel designs that brings your vision to reality

Let luxury be redefined in your space with high-end, innovative & versatile designs.



EXCLUSIVITY

Spearheading remarkable transition of spaces

The unmatched features and exclusivity make these slabs stand apart from others.



LIGHTWEIGHT

Slabs that are built to lasts but are tremendously light weight

Live in an ambiance of comfort & class with slabs that are easy to handle & install.



SUPER SIZE

Unfold endless possibilities with slabs of super size


Make your space more refined with slabs with clean & dynamic aesthetics.



INNOVATION

Crafting brilliance through innovative concepts

Let every corner reflect ingenuity through marvelously crafted slabs.

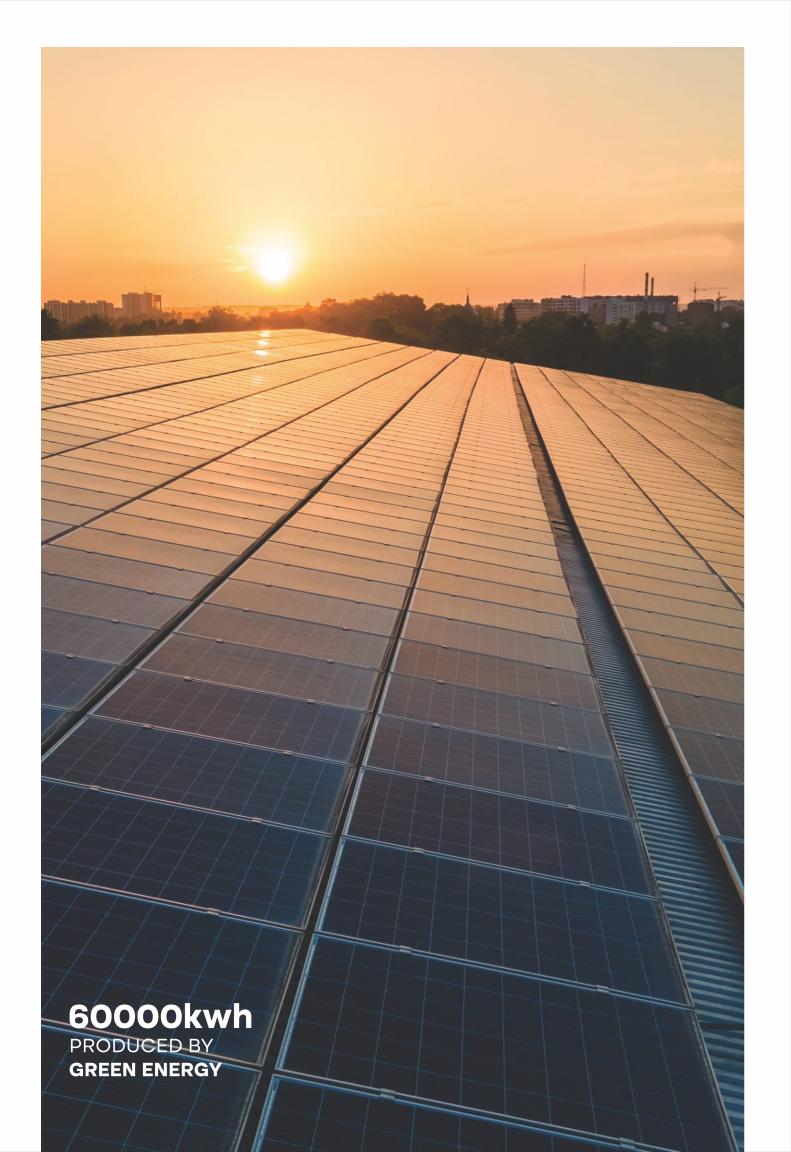





15-30%

RECYCLED MATERIAL CONTAINED IN PRODUCTS





53 21000M³ WASTEWATER TREATED AND REUSED



90% RAW WASTE REUSED IN THE PRODUCTION PROCESS

As a leading ceramic company committed to sustainability, we proudly introduce our innovative tiles manufactured using Solar Energy, revolutionizing the way buildings harness clean power while prioritizing environmental responsibility. Our tiles are crafted with 15-30% recycled materials, demonstrating our dedication to minimizing resource consumption and reducing waste. Additionally, our production process is designed to reuse approximately 90% of raw waste, showcasing our commitment to circular economy principles and minimizing our ecological footprint. We strive to lead the industry towards a greener future by integrating renewable energy solutions with sustainable manufacturing practices. Furthermore, our commitment to sustainability extends to our wastewater management, with over 53,21,000m² of wastewater treated annually, ensuring responsible water usage throughout our production process.

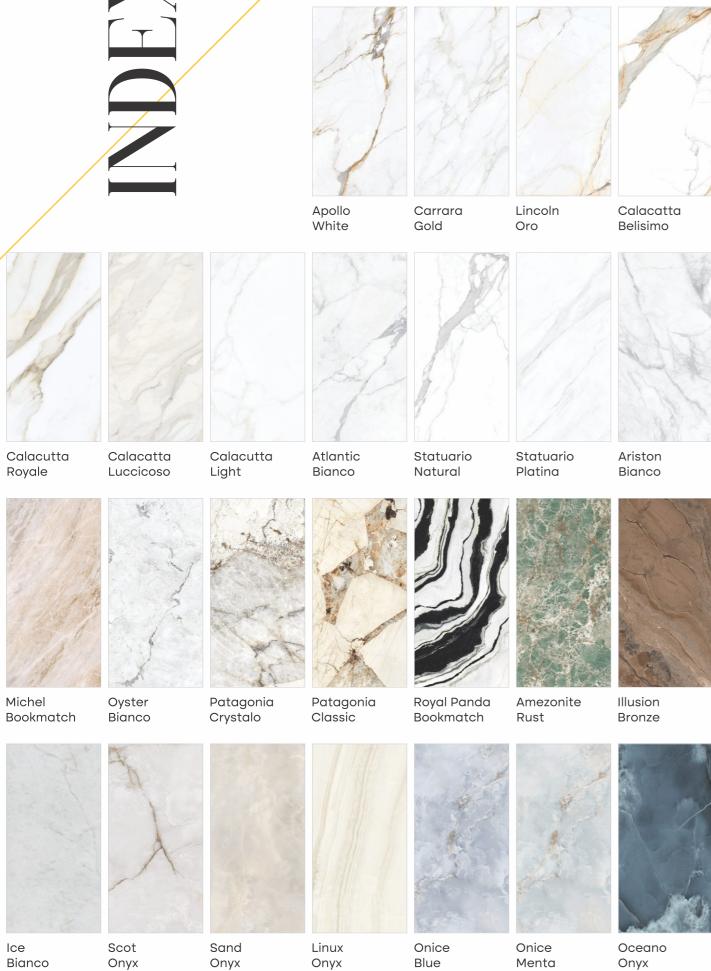

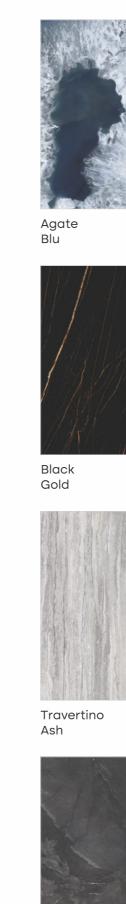

Dazzle

Nero

Teak


Almond

Woodland

Redice

Woodland

Wallnut

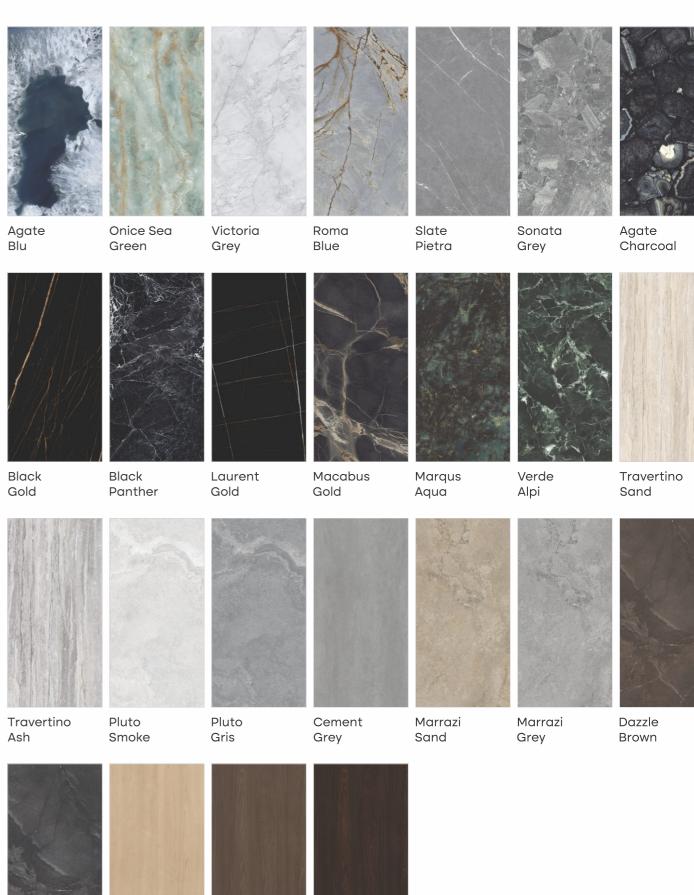




Back To Index








Elevate your home's aesthetic with tile finishes, adding a touch of glamour and sophistication.



APOLLO WHITE

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE

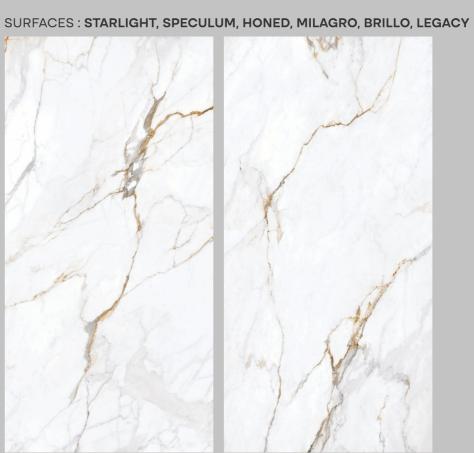



CARRARA GOLD

Back To Index



CARRARA GOLD

Add depth and dimension to every corner with tile accents turning

ordinary spaces into a work of art.

CARRARA GOLD

SIZE: 1600x3200mm | 63"x126"

BODY: WHITE








LINCOLN ORO

Back To Index





Make a bold statement with the striking tile patterns, designed to add drama and personality.



LINCOLN ORO

SIZE: 1600x3200mm | 63"x126"

BODY: WHITE

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO, LEGACY

□ 12mm□ 20mm







CALACATTA BELISIMO

Back To Index



CALACATTA BELISIMO

Paint the canvas of your space with tiles that bring an air of sophistication.





CALACATTA BELISIMO

SIZE: 1600x3200mm | 63"x126"

BODY: WHITE

Thickness

□ 12mm
□ 20mm

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO, LEGACY 20mi



CALACUTTA ROYALE

Back To Index



CALMCUTTA ROYALE

Step into a world of endless inspiration and immerse every corner with brilliance.





CALACUTTA ROYALE

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE





CALACATTA LUCCICOSO

Back To Index



CALACATT/ LUCCICOSO



Experience the luxury of simplicity with sustainable and stylish tile options.

CALACATTA LUCCICOSO

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO, LEGACY





CALACUTTA LIGHT

Back To Index



CALACUTTA



Uncover the beauty of simplicity with our understated yet elegant tile options.

CALACUTTA LIGHT

SIZE: 1600x3200mm | 63"x126"

BODY: WHITE





ATLANTIC BIANCO

Back To Index



Infuse your space with a touch of nostalgia with vintage-inspired tile selections.



F2 Bookmatch



ATLANTIC BIANCO

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE





Back To Index





STATUARIO NATURAL



Experience the perfect balance of form and function with precisely engineered tiles.




STATUARIO NATURAL

SIZE: 1600x3200mm | 63"x126"

BODY: WHITE

SURFACES: STARLIGHT, SPECULUM, HONED, MILAGRO, BRILLO, LEGACY



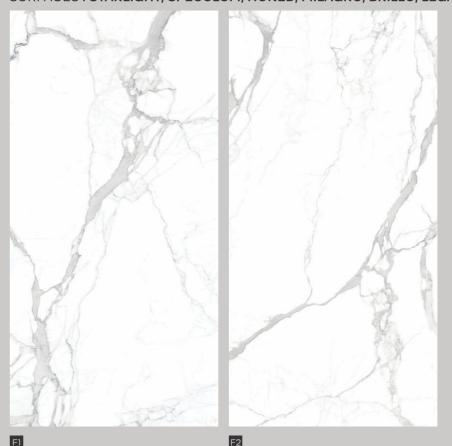



STATUARIO PLATINA

Back To Index



STATUARIO PLATINA

Elevate your home with testament of excellence and quality.







STATUARIO PLATINA

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO, LEGACY





ARISTON BIANCO

Back To Index



ARISTON BIANCO

Immerse yourself in the symphony of colors and patterns.








ARISTON BIANCO

SIZE: **1600x3200mm |** 63"x126"


BODY: WHITE

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO, LEGACY

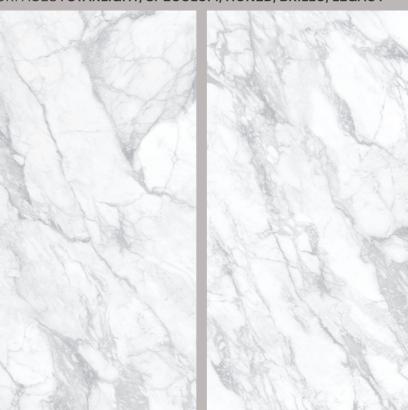



Back To Index





Discover the artistry of intricately crafted designs with bespoke elegance.

MICHEL BOOKMATCH

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE







OYSTER BIANCO

Back To Index





Bring a touch of organic beauty to your space with timeless surfaces.

OYSTER BIANCO

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE











PATAGONI/ CRYSTADO

Infuse your space with character and charm with unique tile design.

PATAGONIA CRYSTALO

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO, LEGACY









Back To Index PATAGONIA CLASSIC





Unravel bespoke designs that expresses your personal style.

PATAGONIA CLASSIC

SIZE: **1600x3200mm |** 63"x126"

BODY: IVORY

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO







ROYAL PANDA BOOKMATCH

Back To Index



ROML PAND BOOKNMTCH

Create a sanctuary of style and comfort with unique & innovative tiles.

ROYAL PANDA BOOKMATCH

SIZE: 1600x3200mm | 63"x126"

BODY: WHITE

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO







AMEZONITE RUST

Back To Index



AMEZONITE RUST



Experience the epitome of architectural finesse & modern sensibilities.

AMEZONITE RUST

SIZE: 1600x3200mm | 63"x126"

BODY: GREY

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO







ILLUSION BRONZE



Transform your space into a sanctuary of style imbued with unique character.

ILLUSION BRONZE

SIZE: **1600x3200mm |** 63"x126"

BODY: BROWN

SURFACES: STARLIGHT, SPECULAM, HONED, MILAGRO, BRILLO, LEGACY



F2



IMPERIAL CERAMIC | BATHWARE





ICE BIANCO

Back To Index





ICE/ BIANCO

Immerse yourself in luxury and unparalleled beauty.

ICE BIANCO

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO, LEGACY















Step into the future of design with our innovative tile options.

SCOT ONYX

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE





















Explore a fusion of timeless charm and modern functionality.

SAND ONYX

SIZE: **1600x3200mm |** 63"x126"







LINUX ONYX

Back To Index





Attain balance within your living space and enhance it to reach a higher standard of quality.

LINUX ONYX

SIZE: **1600x3200mm |** 63"x126"

BODY: IVORY



F2







Bring home tiles that captivate the eye and inspire admiration.

ONICE BLUE

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE











Experience opulence like never before, epitomizing luxury and exclusivity.

ONICE MENTA

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE



F2



OCEANO ONYX

Back To Index



Thickness □ 12mm□ 20mm



Redefine your space into a visionary marvel with durably crafted surfaces and excellent finishes.

SIZE: **1600x3200mm |** 63"x126"

BODY: GREY





SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO













Attribute your space with a dreamy appeal of the surface with unmatched allure.

AGATE BLU

SIZE: **1600x3200mm |** 63"x126"

BODY: WHITE





ONICE SEA GREEN

Back To Index



ONICE SEA GREEN




Turn your space into a visionary marvel with alluring tiles & unmatched opulence.

ONICE SEA GREEN

SIZE: 1600x3200mm | 63"x126"

BODY: IVORY

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO

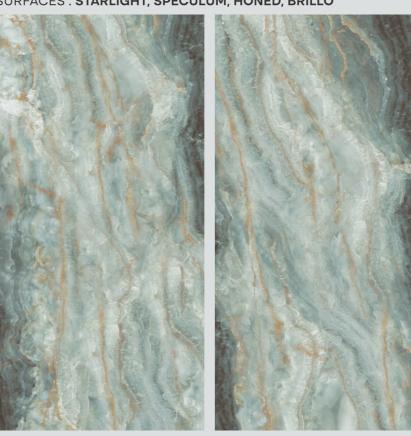



VICTORIA GREY

Back To Index



Infuse your surroundings with contemporary charm effortlessly and redefine every corner.

VICTORIA GREY

SIZE: **1600x3200mm |** 63"x126"

BODY: GREY














Turn ordinary spaces into extraordinary showcases with splendid tiles.

ROMA BLUE

SIZE: 1600x3200mm | 63"x126"

BODY: GREY

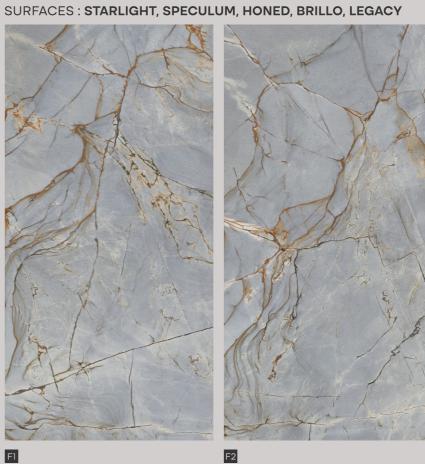









SLATE PIETRA

Discover the awe-inspiring allure of surfaces with impeccable style & sophistication.

SLATE PIETRA

SIZE: 1600x3200mm | 63"x126"

BODY: GREY

Fì

SURFACES: STARLIGHT, SPECULUM, HONED, MILAGRO, BRILLO, LEGACY



F2








SONATAGREY

Create a sense of balance and elevate your space's overall appeal to a new level of elegance.

SONATA GREY

SIZE: 1600x3200mm | 63"x126"

BODY: GREY

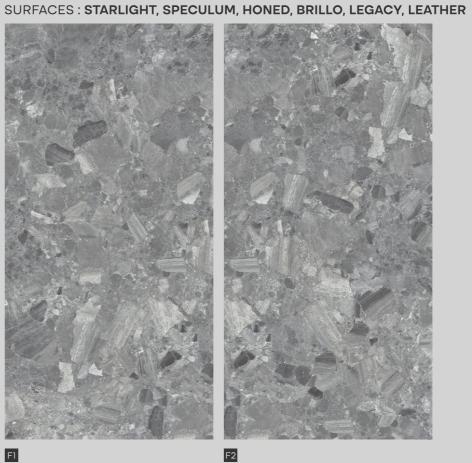



AGATE CHARCOAL

Back To Index





Unfold tiles designed to capture attention and invite admiration into spaces.

AGATE CHARCOAL

SIZE : **1600x3200mm |** 63"x126"

BODY: BLACK

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO










Back To Index

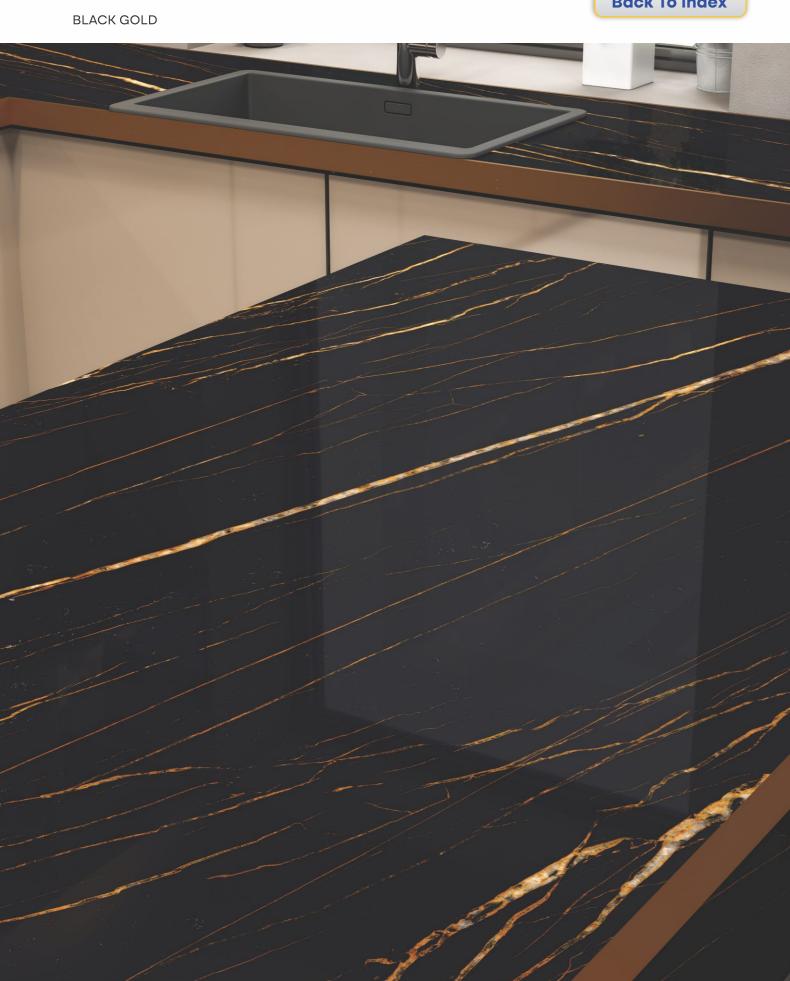



Effortlessly create a contemporary & chic environ with impressive designs & patterns.



BLACK GOLD

SIZE: 1600x3200mm | 63"x126"

BODY: BLACK





BLACK PANTHER

Back To Index






Indulge in the exclusivity of luxury with stunning ceramic artistry.

BLACK PANTHER

SIZE : **1600x3200mm |** 63"x126"

BODY: BLACK

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO, LEGACY

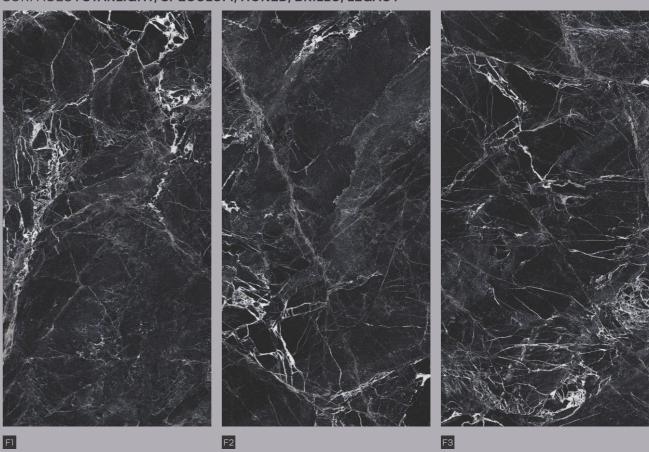





LAURENT GOLD

Back To Index





LAURENGOLD

Elevate your dining experience with tiles offering the perfect blend of organic beauty and modern convenience.

LAURENT GOLD

SIZE: **1600x3200mm |** 63"x126"

BODY: BLACK

SURFACES: STARLIGHT, SPECULUM, HONED, MILAGRO, BRILLO, LEGACY







MACABUS GOLD

Back To Index




A futuristic concept that turns every corner of your space into a masterpiece.

MACABUS GOLD

SIZE: **1600x3200mm |** 63"x126"

BODY: BLACK

SURFACES: STARLIGHT, SPECULUM, HONED, MILAGRO, BRILLO, LEGACY

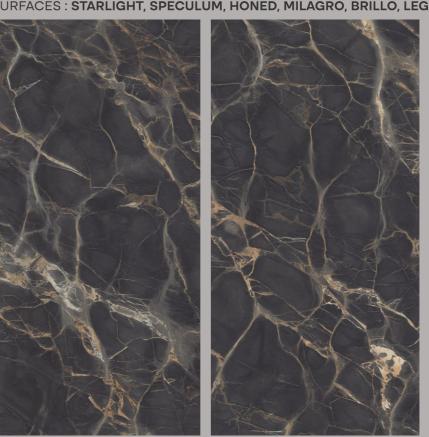

F2





MARQUS AQUA


Back To Index





Tiles that enhance the aesthetic appeal of your home but also ensure longevity.

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO

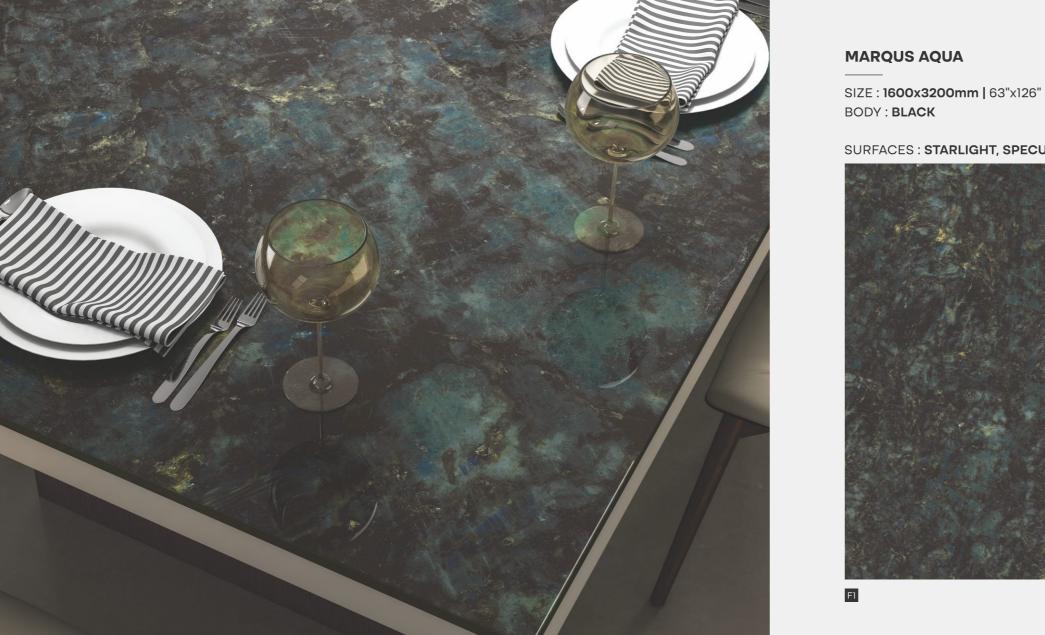



VERDE ALPI

Back To Index






Create a space that is both inviting and enduring with superior ceramic designs.

VERDE ALPI

SIZE: 1600x3200mm | 63"x126"

BODY: BLACK

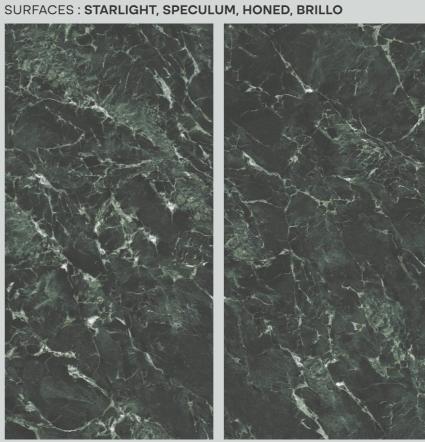

F2





TRAVERTINO SAND

Back To Index



TRAWERTINO SAND



Step into a world where tradition meets innovation in architectural design.

TRAVERTINO SAND

SIZE: **1600x3200mm |** 63"x126"

BODY: IVORY

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO, LEGACY, LEATHER

F2




□ 12mm□ 20mm

Thickness



TRAVERTINO ASH

Back To Index

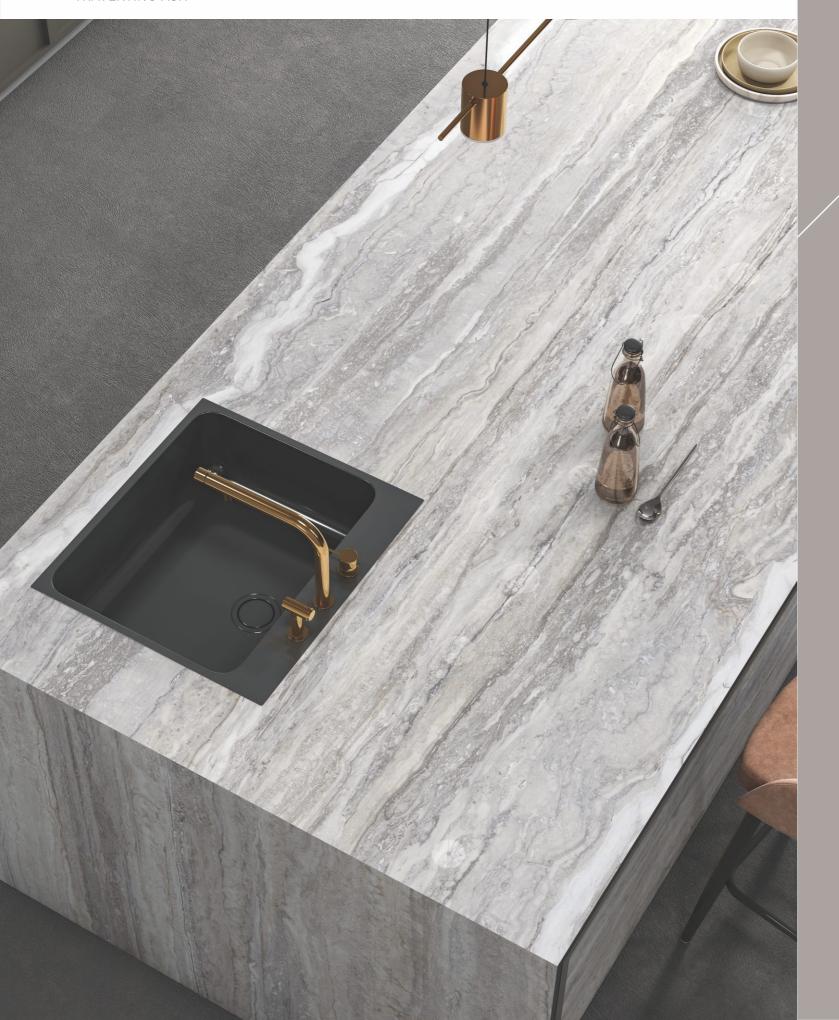

IRANERTINC Str



Create an atmosphere of tranquility and natural beauty within the confines of your home.

TRAVERTINO ASH

SIZE: 1600x3200mm | 63"x126"

BODY: GREY

SURFACES: STARLIGHT, SPECULUM, HONED, BRILLO, LEGACY, LEATHER





PLUTO SMOKE

Back To Index





Redefine sophistication with tiles that capture the essence of nature & instill everlasting charm.

PLUTO SMOKE

SIZE: 1600x3200mm | 63"x126"

BODY: WHITE















PLUTO GRIS

Add unmatched durability to your space as you unveil impeccably designed tiles.

PLUTO GRIS

SIZE: 1600x3200mm | 63"x126"

BODY: GREY

Fl

SURFACES: LEGACY, LEATHER







CEMENT GREY

Back To Index





CEMENT

Transform your space into a sanctuary of opulence with tiles that embody contemporary chic.

CEMENT GREY

SIZE: 1600x3200mm | 63"x126"

BODY: GREY

SURFACE: LEGACY





MARRAZI SAND

Back To Index





Craft your dream interior with tiles that resonate with your vision and align with your style.


MARRAZI SAND


SIZE : **1600x3200mm |** 63"x126"

BODY: IVORY

Fl

SURFACES: LEGACY, LEATHER

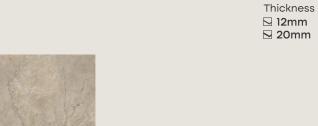

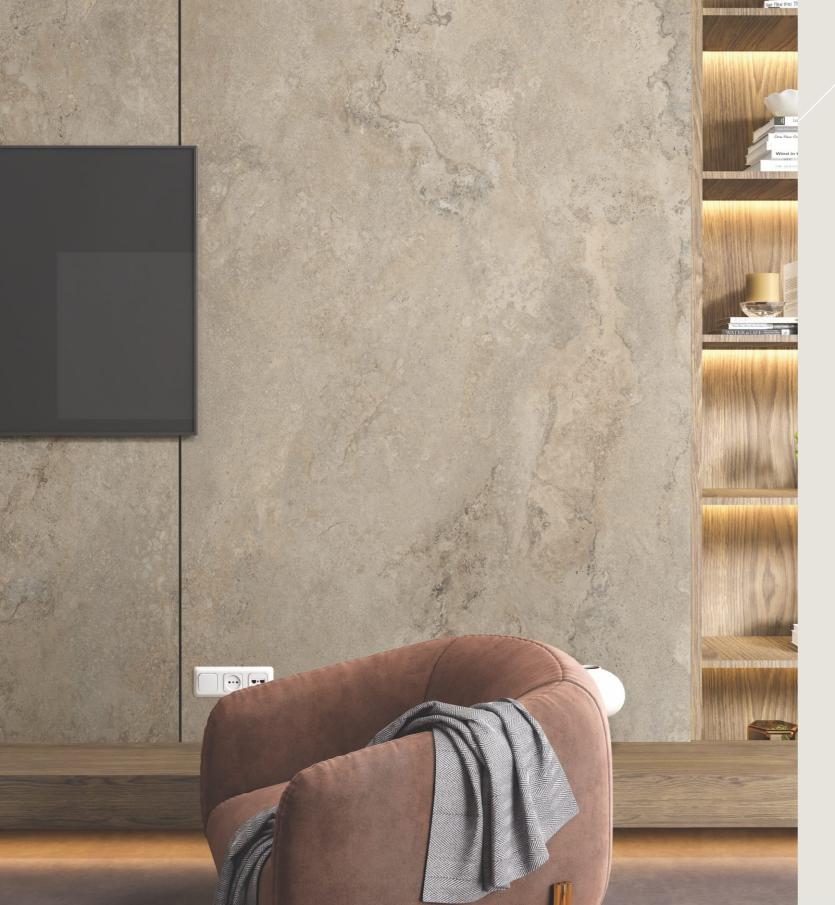



F2



MARRAZI GREY

Back To Index





This neoclassic marvel is a testament to contemporary architectural excellence.

MARRAZI GREY

SIZE: **1600x3200mm |** 63"x126"

BODY: GREY


Fl

SURFACES: LEGACY, LEATHER



F2



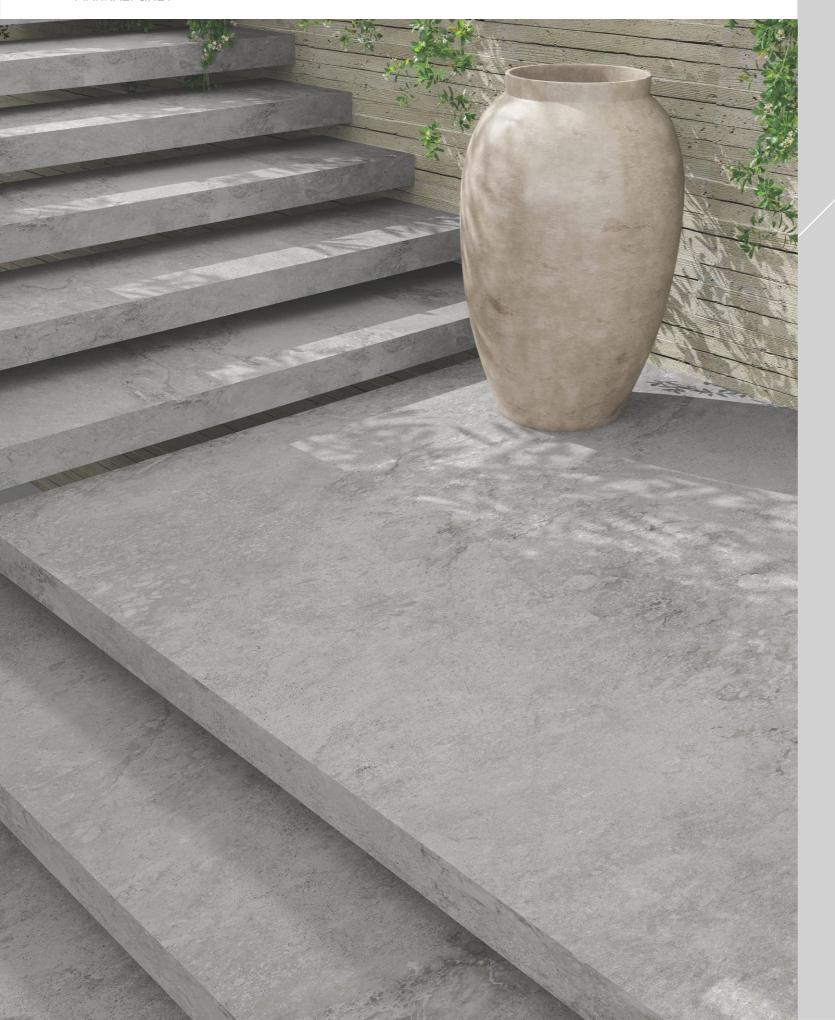



DAZZLE BROWN

Back To Index





Elevate your space with a stunning range of elegant and stylish tiles with tactility.

DAZZLE BROWN

SIZE: 1600x3200mm | 63"x126"

BODY: BROWN

SURFACES: LEGACY, LEATHER











Back To Index





DAZZLE NERO

Experience the artistry of design and spark inspiration in every corner.

DAZZLE NERO

SIZE: 1600x3200mm | 63"x126"

BODY: BLACK

SURFACES: LEGACY, LEATHER





Back To Index







TEAK

Discover the excellent choice for defining modern aesthetics.

TEAK ALMOND

SIZE: **1600x3200mm |** 63"x126"

BODY: IVORY

Fl

SURFACES: LEGACY



F2



WOODLAND REDICE

Back To Index



WOODLAND REDICE



Get the natural beauty indoors with wood-look surfaces.

WOODLAND REDICE

SIZE: 1600x3200mm | 63"x126"

BODY: BROWN

SURFACES: LEGACY









WOODLAND WALLNUT

Back To Index



WOODLANI WALLNUT

Say hello to the elegance of wood

with the practicality of tiles.

WOODLAND WALLNUT

SIZE: 1600x3200mm | 63"x126"

BODY: BROWN


SURFACE: LEGACY










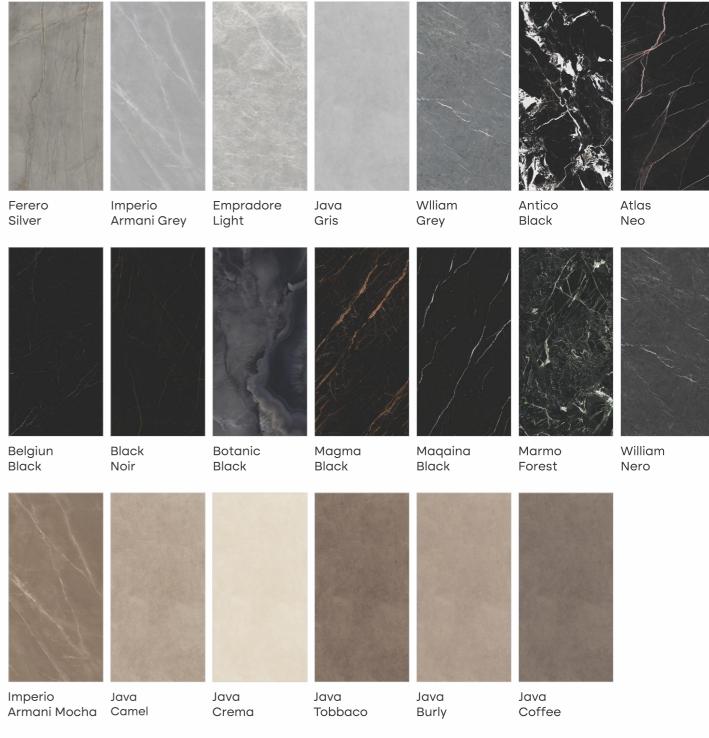

Full Body

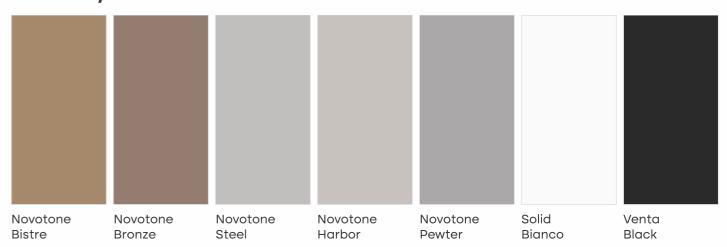

Superior quality raw materials like kaolin, clay, feldspar, silica, and colouring inks are imported from Europe and other parts of the world to manufacture these slabs without compromising on its breaking strength, water absorption, dust, termite and chemical resistance.

Our Slabs are exceptionally hard, resist thermal shock better than any material available today, are virtually nonporous and are a green product. Installation is quicker and easier because of the dimensions of the product. Flooring, wall cladding, kitchen counter tops, vanity tops, steps and risers, and bath surrounds are all possible.

Technical specification

CHARACTERISTIC	TEST METHOD	MEAN VALUE	STD. AS PER ISO13006:2012/ EN14411 Gr.Bla	STD. AS PER IS15622:2017 Gr.Bla	
Regulatory Properties					
Deviation in length and width	ISO 10545-2 & IS 13630-1	± 0.10 %	± 0.50 %	± 0.10 %	
Deviation in thickness	ISO 10545-2 & IS 13630-1	± 4.00 %	± 0.50 % ± 5.00 %	± 5.0 %	
Straightness in side	ISO 10545-2 & IS 13630-1	± 0.10 %	± 0.50 %	± 0.10 %	
•	ISO 10545-2 & IS 13630-1	± 0.10 %	± 0.60 %	± 0.10 % ± 0.10%	
Rectangularity Surface flatness Central Curvature	ISO 10545-2 & IS 13630-1	± 0.10 %	± 0.50 % ± 0.50 %	± 0.10% ± 0.50 %	
	ISO 10545-2 & IS 13630-1	± 0.10 %	± 0.50 % ± 0.50 %	± 0.50 % ± 0.50 %	
Surface flatness Edge Curvature					
Surface flatness Warpage	ISO 10545-2 & IS 13630-1	± 0.10 %	± 0.50 %	± 0.50 % > 95% defects free	
Surface Quality	ISO 10545-2 & IS 13630-1	> 95% defects free	> 95% defects free		
Small Color Difference	ISO 10545-16	No Change	Unaltered	N.A.	
Glossiness (With Nano Polished)	Gloss Meter 60°	> 90° **	As per Mfg.	As per Mfg.	
Glossiness (Without Polished)	Gloss Meter 60°	7° < Gloss < 14°**	As per Mfg.	As per Mfg.	
Glossiness (Satin Finished)	Gloss Meter 60°	15° < Gloss < 25°**	As per Mfg.	As per Mfg.	
Structural Properties					
Water absorption	ISO 10545-2 & IS 13630-3	≤ 0.05 %	≤ 0.50 %	≤ 0.80 %	
Bulk density	DIN51082 & IS 13630-3	> 2.28 gm/cc	> 2.00 g/cc	Min. 2.20 g/cc	
Massive Mechanical Properties					
Modulus of rupture	ISO 10545-4 & IS 13630-6	Min. 37.0 N/mm²	Min. 35.0 N/mm²	Min. 35.0 N/mm²	
Breaking strength thickness <7.5	ISO 10545-4 & IS 13630-6	Min. 1000.0 N	Min. 700.0 N	Min. 700.0 N	
Breaking strength thickness ≥7.5	ISO 10545-4 & IS 13630-6	Min. 1600.0 N	Min. 1300.0 N	Min. 1100.0 N	
Surface Mechanical Properties					
MOH'S hardness	EN 101 & IS 13630-13	Min. 4***	Min. 4	Min. 5	
Surface abrasion resistance-Glossy #	ISO 10545-7 & IS 13630-11	Min. Class 2	As per Mfg.	Min. Class II	
Surface abrasion resistance-Matt #	ISO 10545-7 & IS 13630-11	Min. Class 3	As per Mfg.	Min. Class II	
Thermal Hydrometric Properties					
Moisture expansion	ISO 10545-10 & IS 13630-3	NIL	Max. 0.06	Max. 0.02	
Thermal expansion(COE) at 100°C	ISO 10545-8 & IS 13630-4	Max. 6.0 x 10- ⁶	As per Mfg.	Max. 7.0 x 10-6	
Thermal shock resistance	ISO 10545-9 & IS 13630-5	Min. 10 Cycle	Min. 10 Cycle	Min. 10 Cycle	
Crazing Resistance at 7.5 Bar	ISO10545-11 & IS 13630-9	Min. 6 Cycle	As per Mfg.	Min. 4 Cycle	
Impact resistance(COR)	ISO 10545-5 & IS 13630-14	Min. 0.55	As per Mfg.	Min. 0.55	
Frost resistance	ISO10545-12 & IS 13630-10	Frost Proof	As per Mfg.	As per Mfg.	
Chemical Properties					
**Resistance to Staining Glazed	ISO 10545-14 & IS 13630-8	Min. Class 4 / Min. Class I	Min. Class 3	Min. Class I	
**Resistance to Household Chem-	ISO 10545-14 & IS 13630-8	Min. Class GA / Min. Class AA	Min. Class 3	Min. Class I	
icals & Swimming Pool Salts Glazed	130 10343-13 & 13 13030-8	MIII. Cluss GA / MIII. Cluss AA	MIIII. CIUSS GD	MIII. CIUSS AA	
Resistance to Low / High	ISO 10545-13 & IS 13630-8	Min. Class GLB**/	As per Mfg.	As per Mfg.	
Concentrate Acid and Alkalis Glazed	150 10545-15 & 15 15050-6	Min. Class GLB	As per Mig.	As per Mig.	
Safety Properties	ICO 10545 17	> 0.40	As por Mf=	An par Mf	
Skid resistance(DCOF-DRY)	ISO 10545-17	> 0.40	As per Mfg.	As per Mfg.	
Slip resistance(DCOF)(R value)##	ISO 10545-17	As per surface	As per Mfg.	As per Mfg.	
Determination of Lead & Cadmium	ISO 10545-15	Dose not yield Pb & Cd	As per Mfg.	N.A.	
Release for Glazed Tiles Fire Resistance	N.A.	Fire Proof	As por Mf~	An par Mfm	
Fire Resistance	IN.A.	FIFE PROOF	As per Mfg.	As per Mfg.	

[#] Glaze tiles Intended for use on floor

Pallet & container packing

Size	Thickness	sq. mtr / Slab	Weight / Slab	Pallet Type	Slabs / Pallet	Weight / Pallet	Pallet / Container	Slabs / Container	sq. mtr / Container	Weight / Container	Size of Container
3200x1600mm 3200x1600mm	12mm 12mm	5.12 5.12	145.0 kg 145.0 kg	A-Frame Crate	20 slabs 20 slabs	3010kg 3050kg	9 7	180 140	921.60 716.80	27090kg 21350kg	40 ft 20 ft
3200x1600mm	20mm	5.12	238.0 kg	A-Frame	12 slabs	2966kg	9	108	552.96	26694kg	40 ft

^{##} As per customer requirement

** Glossiness 90% with nano technology

*** Without nano technology (Unpolished Vitrified tiles)


**** Except Hydrofluoric Acid & it's compound

Packaging


A-frames & Wooden Vertical Pallet

To protect the integrity of the big-slabs during transport, optimized packaging has been specially designed and produced for the products.

The slabs are packed and shipped in specially made Wooden Vertical Pallet and on specific A-frames (specially designed to improve the carriage of these products in containers), taking care to protect every single slab from knocks and scratches as best as possible.

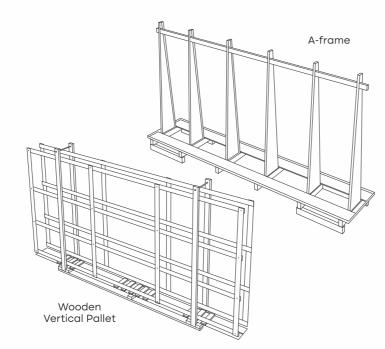


Handling the slabs on the construction site

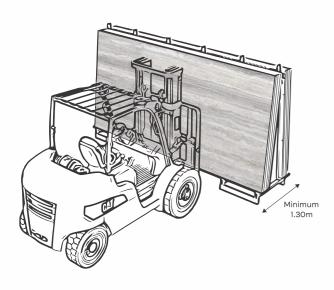

A-frame handling from long side (A)


(Recommended choice)

We recommend you use forks with a length of at least 1.30m, widening them to the maximum limit to make the most use possible of the crate's surface.

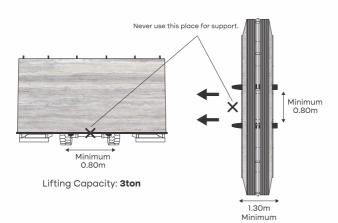


A-frame handling from short side (B)


We recommend you use forks with a length of at least 2.80m, widening them to the maximum limit to make the most use possible of the crate's surface.



Mini O.8

Lifting Capacity: 5ton

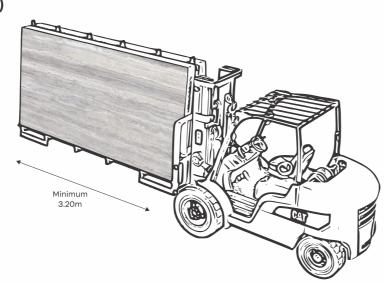

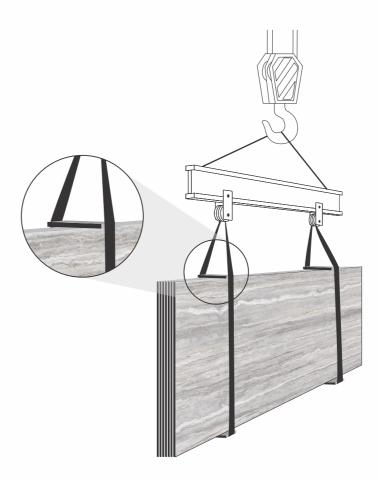

Handling with crane

Always pay attention to the movement and handling of the slabs to prevent splintering or breakage. TheSize recommends using the following type of clamp for lifting and moving individual slabs:


Ensure that for deliveries an oversized stone slab or board is supplied on the steel A-frame as backing support. Strap in Maximum to ensure no horizontal movement occurs during transport.

Panels can also be moved with a vertical clamp and overhead crane. To assist the movement of individual mm panels where the clamp doesn't close to 6mm, a rubber saddle can be made up (see photos) or vacuum suction lifters can be used.

When transporting to site, in particular benchtops with cut outs, always lay bench against a solid substrate such as MDF or similar. Ensure that backing support is at least 2cm wider than the benchtop, strap or tape, or both together, so handling will be easier and will avoid potential damage to panels in particular to cut outs. Always carry panels vertically not horizontally.

Equipment

When handling the slabs, from removing them from the crates through to fitting them on the wall or floor, we recommend you use equipment designed specifically for handling large slabs.

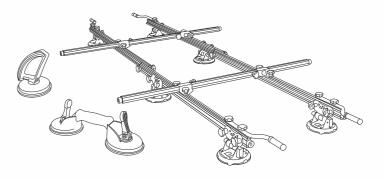

Handling with manual suction cups

In the case of two workers, perform the handling using manual suction cups (preferably equipped with a pressure adjustment function). The workers must remove the slabs by lifting them in the middle, then moving them in an upright position, positioning themselves at the two ends of the long side.

Manual handling

In addition to professional handling machinery, such as pneumatic handling machines or gantries, or the frame stated earlier, the slabs are usually moved (on the construction site and in the warehouse) by workers provided with tools that are commonly available and easy to use.

It is important to remember that manual handling must only be carried out where site conditions are amenable, such as:

- · ample room for manoeuvre;
- · ground-floor location;
- · easy access;
- · limited number of slabs to be laid.

IN ANY CASE, THE SLABS MUST ALWAYS BE HANDLED INDIVIDUALLY AND ENSURING THE WORKERS' COMPLETE SAFETY.

Special cuts & finishes

Tops

Our slabs have a wide range of applications in interior design and both the 12mm versions can be used (after plating with a support panel) and the 20 mm versions, which do not require reinforcement underneath.

Whatever processing is envisaged, it is a good idea to have the final tile made at professional machining centres specializing in this type of product.



Tops CNC machining

Also in this case, the discs and the various tools must be diamond-enhanced for stoneware and water-cooled, with a rotation speed ranging from 1900 to 2500rpm (revolutions per minute) and a travel speed of 1-2 m/minute depending on the type of tool.

With this machine you can make the flush fit finish, which must be scored prior to making the cutout for the sink

With CNC machines, you can make the flush fit finish by proceeding as stated below:

- 1. Drill the first hole
- 2. Make the score
- 3. Cut out the hole for the sink

Tops disc-cutting

Use water-cooled continuous and segmented rim diamond discs for stoneware, with input and output speeds reduced by 50%.

The rotation speed and the travel direction must be set in based on the disc size and the processing type.

45° cuts are made with machines with tilting discs and, in the case of L-shaped workpieces, it is advisable to make a hole in the corner before proceeding with the linear cuts.

The same diamond discs can be mounted on manual grinders for finishing purposes, using the same procedures. The disc should only protrude from the lower part of the slab, very slightly (1-2 mm).

Tops processing


The slabs can be cut, shaped, and transformed with cutouts for sinks or holes for taps, using the professional machines in use at machining centres, such as disc cutters, CNC machines and water jet cutters.

Tops water jet cutting

This is by far the most powerful type of processing and the one that allows the most types of cutting, shaping or holes to be made, and provides the cleanest edge requiring minimum final rounding.

The slabs must rest firmly on the support grid, which must be flat and devoid of residues from prior processing.

The hole for the cutout must be made inside the cutout area using carefully controlled speed and pressure based on the thickness of the slab being cut and the kind of processing required.

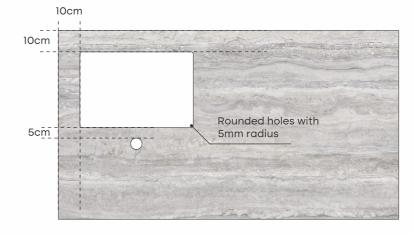

Holes for cutouts

During the top design stage, when making the holes for the taps and the cutouts, apply a minimum distance of 10cm from the outer edges, with respect to the edges and in the event of a series of cutouts (double sink or opening for a hob).

The inner corners must have a minimum radius of 5 mm.

The top outer edges must always chamfer.

We recommend radiuses of more than 1/4" when the kitchen design allows as it makes the countertop firmer.




The correct way to create a cutout, except with waterjet and digital control bits, is to first drill the corners and then the rest of the cuts.



All cutout corners must have a minimum diameter of 1/4". Never leave 90° angles.

Guidelines for cutouts




- Two straight cuts must never be joined
- No squared inner corners
- All inner corners must have one radius

If the countertop design so allows, avoid large cutouts. Experienced manufacturers make large cutouts but following their own risk assessment.

If the countertop design so allows, avoid stone countertops with unbalanced weights:

Irregular cuts are also not recommended such as for a "farmhouse sink"; in these cases, add joints to the countertop design:

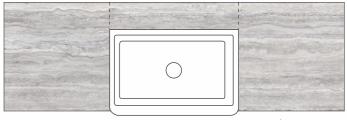


√ CORRECT

Observations

L-shaped countertops

Dividing L-shaped countertops into several parts is recommended to avoid 90° corners in one part.

Make sure the furniture is in perfect conditions and level before installing this type of countertop.






Sinks

For large-size sinks, place a rod support structure under the sink so the weight is on the rods and not the countertop. Removing more than 6mm on a 12mm slab or 10mm on a 20mm slab is not recommended. Undermount sinks To reduce the risk of splintering to a minimum, a round edge with a radius of at least 2mm is recommended.

Glass-ceramic / induction stovetops



The minimum distance between the countertop and a stovetop must be 2mm.


Use the right heat-resistant silicone or the joints supplied by the stovetop manufacturer.

Removing more than 6 mm on a 12 mm slab or 10 mm on a 20 mm slab is not recommended.

Circular holes

Using a diamond bur, start cutting the hole with the hammer drill function switched off, cutting the slab at an angle of approximately 75°.

Slowly straighten the drill, moving it carefully from side to side and taking care to keep both the bur and the slab wet.





000



Rectangular holes


First of all, using a pencil, mark out the rectangular hole required. Using a drill with a diamond bit (6mm to 7mm), start cutting the slab with the hammer drill function switched off, working at an initial angle of approximately 75°. Then proceed to cut out the hole, applying constant pressure and carefully moving the drill from side to side. It is very important to keep both the drill bit and the slab wet. Proceed by cutting along the marked line, using an angle grinder with a diamond disc fitted.

45° Angles

The edge used in this application must then be manually bevelled with a suitable tool, and final-polished (only the 12 mm slabs, i.e. those made of two 6-mm slabs coupled together) using polishing wheels in increasing order of abrasive force.


Start cutting the slab with a 45° angle using the cutting bar accessory. Proceed by slowly cutting at a 45° angle, at a constant speed, along the entire edge of the slab.


Lastly, hone the slab's sharp edges with a rubber pad or a diamond pad.

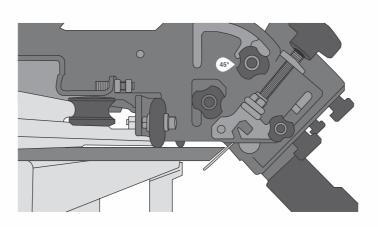

Laying & fixing

Before carrying out any process on the slab and installing it, it is necessary to verify conformity of the material and the possibility of matching with shades already present at the building site. We do not accept complaints about materials that have been processed and installed.

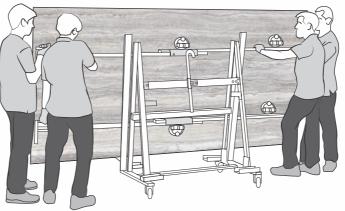

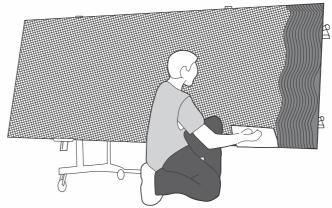


Large format SLABS always require back-buttering. Back-buttering describes the process of applying a layer of adhesive to the back of the tiles using a trowel.

Using a specialist wheeled transport cart, fix the large format slab in a vertical position on the handling frame with the use of suction cups. Use a 10x10mm square toothed trowel for applying your adhesive to the wall or floor and when back-buttering, use a 3x3mm square toothed trowel for the back of the tile.

Using the handling frame with suction cups, bring the slab into a vertical position and slowly lower it to horizontal. These SLABS should be firmly pressed into the adhesive along a straight edge, collapsing all adhesive ridges. Use a levelling system to avoid lippage and frequently checks that your SLABS are even using a suitable box level. Levelling systems are available with 2mm 3mm and 5mm tile spacers.


Periodically check the tiles backs to make sure there is full contact between the adhesive and tile. If not, apply additional adhesive to the tile or use a troll with larger notches in your adhesive. As you are working wipe off excess mortar with a wet sponge.



Correct preparation of the subfloor or laying surface is crucial. The laying surface should be rigid, non-flexing and capable of supporting the expected load with minimal or no deflection. A level subfloor is extremely important in order to keep tiles from cracking. Sanding high spots and the use of a levelling compound on low spots is essential. It is also important that the SLABS are clean and dry, if necessary wash them with clean water and dry them thoroughly before fixing.


Whatever your specific requirements, whether they be for standard or large formats or within the internal or external applications, selecting the appropriate cement-based, fibre-reinforced or ready-mixed adhesive is vital to ensuring the success of your project.

Once your subfloor is clean and dry, spread the adhesive on the surface to be covered with a 10x10mm square toothed trowel, covering an area 5cm to 10cm more than the size of the SLABS. Always apply the adhesive in stripes running parallel with the short edge to remove air pockets and bubbles. By using this method, full coverage of the SLABS with adhesive is ensured.

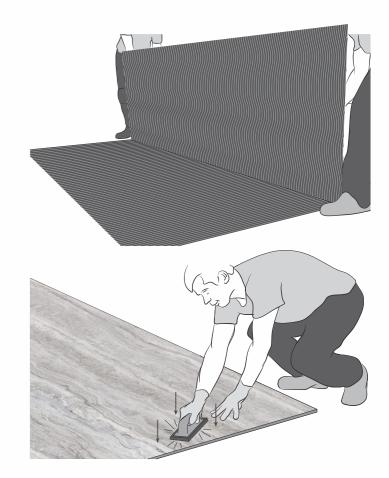

Edge profile


These surfaces boast a 12mm thickness that makes them extra durable and sturdy and the full body offers the possibility of various edge profiles providing complete creative freedom.

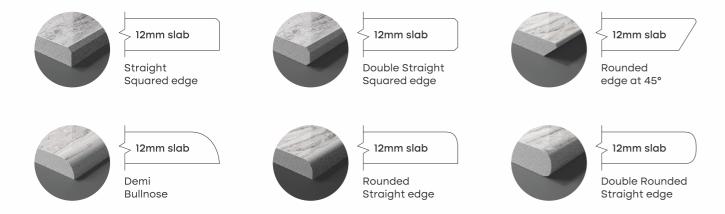

Tops edges


Whatever kind of edge you intend to use will have to be completed with a chamfer or bevel around the perimeter and its finish can be produced using either automatic machines or manually, using suitable discs.

A straight edge must be at least 2mm wide, while rounded edges must have a curvature angle of at least R 2mm, and a third edge can be made with 12mm thick with an angle of less than 30-35° and an upper finish as specified.

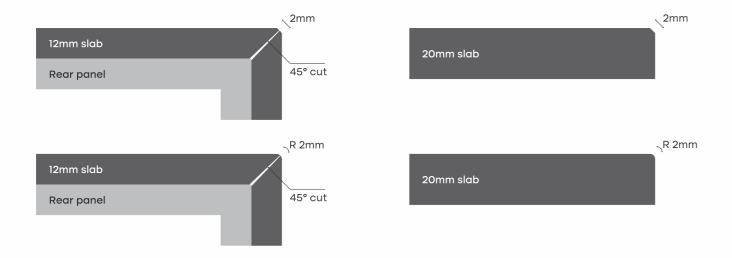

Metal section bars

Alternatively and depending on style requirements, metal section bars can be used for the thinner slabs which are quite commonplace nowadays.

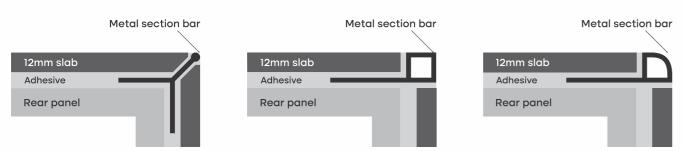

Cleaning, maintenance & care

The slabs are extremely easy to clean and do not require particular maintenance work.

The production process (involving very high-quality raw materials and high firing temperatures) makes the finishes of slabs non-absorbent and their surfaces almost completely non-porous, which means that cleaning operations are simple and efficient.

In fact, the ceramic structure does not allow dirt to penetrate inside the slab.

Post-installation cleaning

After processing and gluing the material, clean the ceramic surface to remove any contaminants (patinas, residues of fillers or adhesive, etc.) that may be present. It is crucial to perform this step properly because it may cause halos if done incorrectly.

To clean structure surfaces, we advise quickly removing stains with plenty of water and a liquid vacuum cleaner to remove the dirt that could deposit on the surface structure. It is important to complete the cleaning phase before the adhesive hardens completely because, give the surface structure, it would be more difficult to remove the adhesive after it has hardened completely.

For correct cleaning, always follow the specific instructions provided by producers of cementitious and epoxy fillers and adhesives used to install slabs to find out which products to use plus methods and waiting times.

If installing slabs outdoors, we suggest cleaning up right after installation during the coolest hours of the day.

Do not use abrasive substances or equipment. Under no circumstances use hydrofluoric acid or products that contain it.

The indications listed in this paragraph are not valid for series and finishes. Consult paragraphs 14.1.1 for instructions for these finishes.

Any inability to remove residues of materials used during installation after they have dried cannot be considered a material defect.

During installation and cleaning, sweep the glossy finished products frequently to avoid surface scratches.

Type of dirt	Type of detergent
Beer, wine, coffee	Sodium hypochlorite (bleach) in solution or alkaline detergent
Ice cream	Sodium hypochlorite (bleach) in diluted solution
Tyre rubber	Organic solvent (trichloroethylene)
Greases and oil	Alkali-based detergent
Inks	Sodium hypochlorite (bleach) in solution or alkaline detergent
Indelible felt-tip	Organic solvent (trichloroethylene acetone)
Resins	Organic solvent (turpentine, white spirit, thinner)
Lines from aluminium	Acid detergent or abrasive cream/powder detergent
Rust	Acid-based detergent
Fruit juices	Sodium hypochlorite (bleach) in diluted solution
Other stains	Abrasive cream detergent

WARNINGS:

- Always comply with the dosages and times recommended by the producer and test in advance on uninstalled material or hidden parts of the installed surface.
- $\bullet \quad \text{If using acid detergents, before cleaning wet the grouts with plenty of water or protect them from the detergent's corrosive action.}$
- In a location requiring special cleaning parameters (kitchens, hospitals, shops, etc.) or with particularly stubborn types of dirt (outdoor pavings, workshops, etc.), the cleaning procedures recommended above should be combined with scrubber-drier machines and specific products.
- Before starting cleaning procedures, always read the technical datasheets provided in the catalogues for each collection with great care.

Technology

Delivering modern problems their modern solutions with modern technology along with an innovative approach is the need of the hour.



















Quality accreditations



















Export country

WORLD-CLASS QUALITY READY TO EXPLORE MARKETS

Exceptional products are ready to rule the domestic and international market.

Our superior product range consisting of innovative products and excellent quality are ready to put their mark on the domestic and international market. The expertise, spectacular range, premium offering, and quality will soon rule markets with extensive domestic and worldwide exports.

	Colombia	•	Jordan	③	Brazil
	USA	44	Iraq	Cill	Uzbekistan
•	Israel		Bulgaria		Venezuela
A	Lebanon		Russia	₩÷	New Zealand
•	Portugal		UK	無	Australia
(::	Singapore		UAE		Palestine
	Kenya		Thailand	€	Cypras
<u>.</u>	Panama	_	Poland		Taiwan
e e	Peru	.3	Mexico		Indonaesia
â	Spain		Syria	- Č	Ecuador
>	South Africa	*	Vietnam	<u> </u>	Saint Lucia
	Costa Rica	I+I	Canada	*	Mexico
	Chile	*	Ghama		







IMPERIAL CERAMIC GUJARAT, INDIA.

info@imperialceramic.in

www.imperialceramic.com